


Einphasen - Transformator

ETO 850191

DATASHEET				
		850191		
Transformer type		MONOPHASE		
Standard reference		EN61558-2-6		
Power	VA	50		
Frequency	Hz	50/60		
Input voltage	V	0/230		
Output voltage 1	V	0/24	VA	50
Electrostatic screen	-	NO		
Service	Type	CONTINUOUS		
Cooling	Type	NA		
Installation altitude	-	< 1000 MT above s.l.		
Protection degree	IP	00		
Insulation class	Type	F		
Overtemperatur class	Type	F		
Vacuum losses	W	4 W		
Winding losses	W	5,5 W		
Insulation voltage between windings	V	4200 V		
Insulation voltage between windings and earth	V	2700 V		

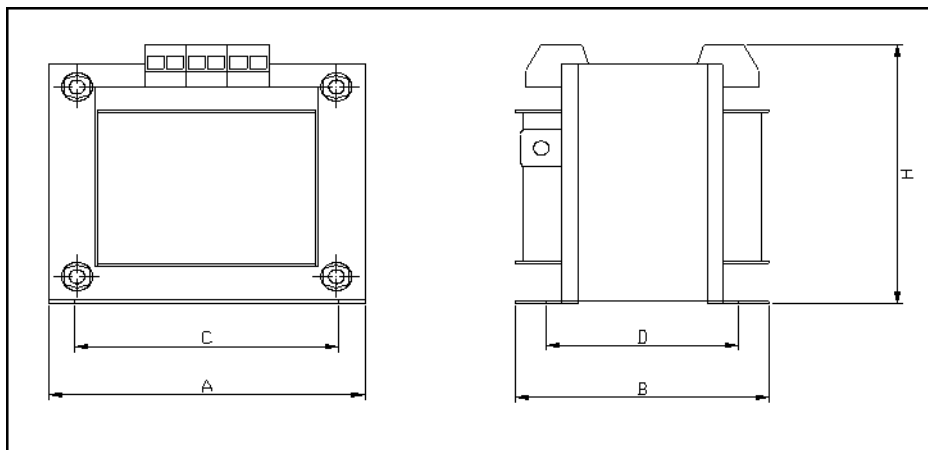

Width mm.	A	77	Height mm.	H	78
Depth mm.	B	85	Weight	Kg	1.1
Holes mm.	CxD	56X47			

NOTE: DATA ARE INDICATIVE AND NOT BINDING



■ REO Elektronik AG

Im Halbiacker 5a · CH-8352 Elsau

Tel.: +41 (0)52 363 2820

Fax: +41 (0)52 363 1241

E-Mail: info@reo.ch

Internet: www.reo.ch

Divisions:

REO Vibratory Feeding and Power Electronics Division

REO Vibratory Feeding and Power Electronics Division
Brühler Straße 100 · D-42657 Solingen
Tel.: +49 (0)212 8804 0 · Fax: +49 (0)212 8804 188
E-Mail: info@reo.de

REO Train Technologies Division

REO Train Technologies Division
Erasmusstraße 14 · D-10553 Berlin
Tel.: +49 (0)30 3670236 0 · Fax: +49 (0)30 3670236 10
E-Mail: zentrale.berlin@reo.de

REO Drives Division

REO Drives Division
Holzhausener Straße 52
D-16866 Kyritz
Tel.: +49 (0)33971 485 0 · Fax: +49 (0)33971 485 90
E-Mail: info@reo.de

REO Medical and Current Transformer Division

REO Medical and Current Transformer Division
Schuldhölzinger Weg 7 · D-84347 Pfarrkirchen
Tel.: +49 (0)8561 9886 0 · Fax: +49 (0)8561 9886 40
E-Mail: info@reo.de

REO Test and PowerQuality Division

REO Test and PowerQuality Division
Brühler Straße 100 · D-42657 Solingen
Tel.: +49 (0)212 8804 0 · Fax: +49 (0)212 8804 188
E-Mail: info@reo.de

PRODUCTION+SALES:

■ China

REO Shanghai Inductive Components Co., Ltd
No. 536 ShangFeng Road · Pudong, 201201 Shanghai · China
Tel.: +86 (0)21 5858 0686 · Fax: +86 (0)21 5858 0289
E-Mail: info@reo.cn · Internet: www.reo.cn

■ India

REO GPD INDUCTIVE COMPONENTS PVT. LTD
2/202 Luna Road · Village Luna · Taluka Padra
Vadodara · 391440 · India
Tel.: +91 (2662) 221723
E-Mail: info@reogpd.com · Internet: www.reo-ag.in

■ USA

REO-USA, Inc.
8450 E. 47th St · USA-Indianapolis, IN 46226
Tel.: +1 317 8991 395 · Fax: +1 317 8991 396
E-Mail: info@reo-usa.com · Internet: www.reo-usa.com

SALES:

■ France

REO VARIAC S.A.R.L.
ZAC Du Clos aux Pois 1 · 6/8 rue de la Closerie-LISSES · F-91048 Evry Cédex
Tel.: +33 (0)1 6911 1898 · Fax: +33 (0)1 6911 0918
E-Mail: reovariac@reo.fr · Internet: www.reo.fr

■ Great Britain

REO (UK) Ltd.
Units 2-4 Callow Hill Road · Craven Arms · Shropshire SY7 8NT · UK
Tel.: +44 (0)1588 673 411 · Fax: +44 (0)1588 672 718
E-Mail: main@reo.co.uk · Internet: www.reo.co.uk

■ Italy

REO ITALIA S.r.l.
Via Treponti, 29 · I-25086 Rezzato (BS)
Tel.: +39 030 279 3883 · Fax: +39 030 279 0600
E-Mail: info@reotalia.it · Internet: www.reotalia.it

■ Poland

REO CROMA Sp. z o.o.
ul. Pozaryskiego 28, bud 20 · PL-04-703 Warszawa
Tel.: +48 (0)22 812 3066 · Fax: +48 (0)22 815 6906
E-Mail: croma@croma.com.pl · Internet: www.croma.com.pl

■ Spain

REO ESPAÑA 2002 S.A.
C/Manuel Ventura i Campeny 21B · local 9 · E-08339 Vilassar de Dalt (Barcelona)
Tel.: +34 937 509 994 · Fax: +34 937 509 995
E-Mail: info@reospain.com · Internet: www.reospain.com

■ Turkey

REOTURKEY ELEKTRONİK San. ve Tic. Ltd. Şti.
Halil Rifatpaşa Mah. · Darülcemal CD Perpa Tic Merkezi
B Blok Kat 8 No:1095 · TR-34384 Sisli – İstanbul
Tel.: +90 (0)212 2215 118 · Fax: +90 (0)212 2215 119
E-Mail: info@reo-turkey.com · Internet: www.reo-turkey.com